

TurbSense

Turbidity and Suspended Solids Monitor

ENGEZER
SOLUÇÕES EM ANÁLISE DE
GASES

The TurbSense range of Turbidity/Suspended Solids analysers is an ISO 7027 compliant Turbidity Meter covering the range of 0.01-1000 NTU (0.01-2000mg/l depending on the sample).

- Autoclean solid state optical sensor - no moving parts
- Single point calibration - no 'zero' required
- Stable and reliable - excellent process control
- Suitable for all potable, waste and most process waters
- 'Maintenance free' with up to 3 months between calibration
- From 0.01-1000 NTU (0.01-2000 mg/l, application dependent)
- Up to 10 Bar
- Extremely low total cost of ownership



"In a constant sample, the drift is <0.01 NTU per month. Amazing!"

Dr. Jeff Prest, UK.

The TurbSense sensors are available with different controllers giving you the same great performance with different communication, display, and control options. With the TurbSense range of turbidity meters, you get great stability, reliability and ease of use coupled with great resolution and limits of detection.

CRONOS® TurbSense



- High Quality - Lowest Cost
- Multilingual
- High resolution grayscale display
- 9 buttons for easy navigation
- Graphing and datalogging
- Enclosure; wall, panel, pipe or pole mounting. IP65/Nema 4x.
- Options:
 - Modbus LAN
 - Modbus RS485
 - Profibus
 - Up to 2 sensors
 - PID controls
 - Flow proportional controls
 - Remote sensors

CRIUS® TurbSense



- Highest Quality - Low Cost
- Multilingual
- High resolution colour display
- Intuitive user interface
- Customisable home pages
- All CRONOS® options plus:
 - Downloadable data logs
 - Up to 4 sensors
 - Remote access via LAN
 - Remote access via GPRS
 - Expandable to 16 sensors

For more information please see the individual brochures for CRONOS® and CRIUS®

Flow Cell Mounting

Pi's TurbSense range of Turbidity/Suspended Solids analysers can be mounted in a custom made flow cell, also available from Pi.



Advantages include:

- Made from black polypropylene plastic - eliminating stray light
- Covered - eliminates ambient light
- Baffles - remove bubbles



Principle of Operation

TurbSense determines true turbidity and/or suspended solids in water, using a nephelometric measurement of scattered light in accordance with ISO 7027. The TurbSense sensor uses lifetime-based optical technology to provide an extremely stable, accurate, low maintenance sensor, with no moving parts and no consumables.

Each probe is equipped with a light source, a side detector for the measurement of scattered light from the sample and a reference detector for monitoring the light output. The light source is a long-life IR LED emitter. This configuration allows accurate and reliable measurements of turbidity and suspended solids to be made. Reliable calibration can be carried out using a single calibration with no need for a 'zero'. The method of determining the correct reading and the calibration is subject to a patent application.

The probes are constructed of stainless steel and sapphire so can withstand demanding operating environments. An Autoclean system can be included to keep the optical surfaces clean, thereby reducing maintenance to a potential 'maintenance free'.

Mounting

The TurbSense can be mounted on the end of a pole for dip mounting in a channel or tank, or in a debubbling flow cell.

Calibration


Calibration of the TurbSense really couldn't be easier! Either take a reading of the water with another method and enter

the value into the front screen or put the TurbSense sensor into our black polyethylene calibration pot filled with 0.5l of standard (typically 20 NTU). The analyser calibrates the sensor by a procedure that reduces the light output through four stages, taking measurements at each. This process provides a very accurate and reliable zero and span without the requirement to use a '0' NTU sample.

Note: If your water is <10 NTU, it is not suitable for calibration, use a standard instead.

Cleaning

To keep the sensor clean, the TurbSense is fitted with a cleaning line. This can be used to clean the optical windows with a jet of air or water. This cleaning procedure can be automated to carry out the cleaning at predefined intervals.

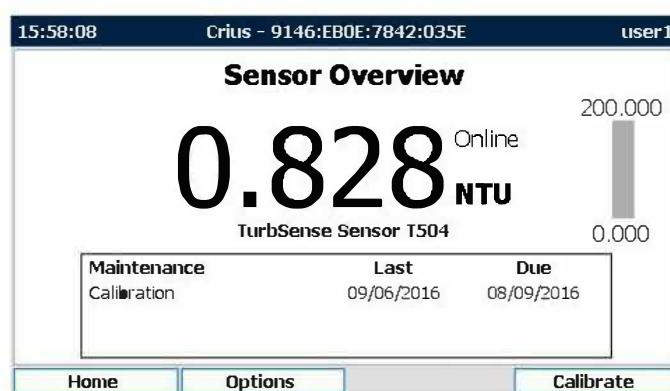

TurbSense Sensor Overview Screen

Specification*

Range:	Selectable within 0.01-1000 NTU, 0.01-2000 mg/l (application dependent)
Typical Ranges:	0-20 NTU, 0-100 NTU, 0-1000 NTU
Linearity:	$r^2 > 0.99$
Response Times:	$T^{90} > 10s$ (adjustable based on averaging)
Accuracy:	$< 1\%$ of measured value or 0.01 NTU (whichever is greater)
Repeatability:	$< 0.3\%$ of measured value or 0.005 NTU (whichever is the greater) (Ref: ISO 15839)
Unit Of Detection:	0.01 NTU (0-10 NTU, Ref: ISO 15839)
Temperature:	-20 to +85°C
Pressure:	0-10 Bar
Averaging:	10s - 10min
Lamp Source:	IR LED, 820nm
Cleaning Cycles:	User settable cleaning cycle time and cleaning time
Cleaning:	Autoclean water or air jet
Enclosure rating:	IP65
Sensor Environmental Protection:	IP68
Display:	Value and Alarms at the same time, controller dependent
Resolution:	0.001 NTU (0-10), 0.01 NTU (10-100), 0.1 NTU (>100)
Calibration:	One point (zero not required)
Diameter:	38mm (1.5 inch)
Length:	278mm (11 inch)



**All subject to*